



Cam fitting VB 36 M




Cam fitting VB 36 M

- Decorative connecting fittings for positive connections of panels and sides according to the tried and trusted eccentric latching principle.
- The connecting fittings are **equipped with a torque support** which allows panels to be up to **2 mm** apart before tightening.
- The fitting is pressed into double holes with a drilling distance of 32 mm. 20 mm and 10 mm diameter insertion drilling holes.
- The panel can be inserted from above.**
- For bottom panels, the eccentric cam can be tightened also from above. For this purpose, a through hole in the shelf is required.

**System
32**



Fit shelf in position from above. Mounting aid when hanging shelves.

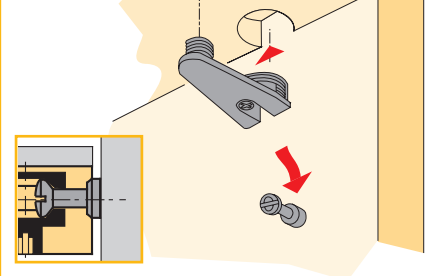

Connecting fitting VB 36 M/16 for 16 mm panels




Article	Finish	Order no.	PU
VB 36 MD / 16 die-cast zinc	nickel-plated	065 517	200
VB 36 M / 16 plastic	white	1 019 482	500
	brown	1 019 483	500
	black	079 647	200
	almond	1 076 883	500

Connecting fitting VB 36 M/19 for 19 mm panels




Article	Finish	Order no.	PU
VB 36 MD / 19 die-cast zinc	nickel-plated	1 019 493	250
VB 36 M / 19 plastic	white	1 019 484	500
	brown	1 019 693	500
	black	079 648	200
	almond	9 000 239	500


Drilling pattern for panels

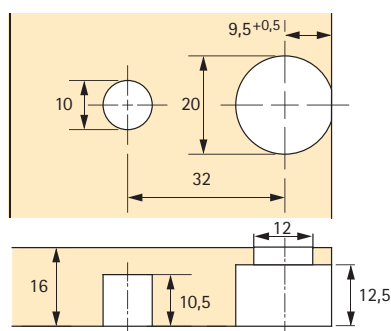

Dowel centre from underside of panel

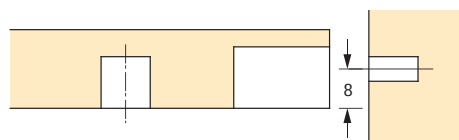

Drilling pattern for panels

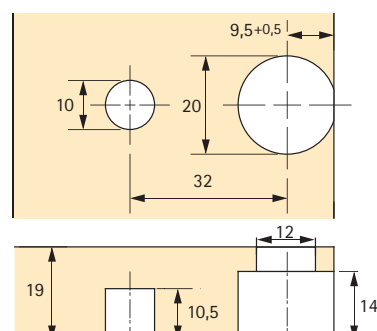

Dowel centre from underside of panel

